

THINKING INSIDE THE BLACK BOX: ENHANCING
THE SOCIAL VULNERABILITY INDEX WITH AN
ARTIFICIAL NEURAL NETWORK

by

Ryan Patrick Hile

A thesis submitted to the faculty of
The University of Utah
in partial fulfillment of the requirements for the degree of

Master of Science

Department of Geography

The University of Utah

August 2015

Copyright © Ryan Patrick Hile 2015

All Rights Reserved

The University of Utah Graduate School

STATEMENT OF THESIS APPROVAL

The thesis of Ryan Patrick Hile

has been approved by the following supervisory committee members:

<u>Thomas J. Cova</u>	, Chair	<u>1 May 2015</u> Date Approved
<u>Neng Wan</u>	, Member	<u>1 May 2015</u> Date Approved
<u>Richard M. Medina</u>	, Member	<u>1 May 2015</u> Date Approved

and by Andrea Brunelle, Chair/Dean of

the Department/College/School of Geography

and by David B. Kieda, Dean of The Graduate School.

ABSTRACT

The Social Vulnerability Index (SoVI) has served the hazards community well for more than a decade, but it is based on linear statistical methods. Using Utah as a test case, a state with a population exposed to a variety of hazards, this study sought to build upon the SoVI approach by augmenting it with a nonlinear Artificial Neural Network (ANN). A SoVI was created for the state of Utah at the census block group level using five-year data (2008-2012) from the American Community Survey. The SoVI provided a dataset from which to train a neural network. The ANN was then used to classify a subset of the state to determine if it could provide a comparable classification of vulnerability. The ANN produced a vulnerability classification that was approximately 26% consistent with the SoVI created using the traditional approach. The differences in classifications were assessed using radar plots of block group variable averages to explore how the variables were handled in each classification. The results of this study warrant further investigation of the capabilities of an ANN-enhanced SoVI.

TABLE OF CONTENTS

ABSTRACT.....	iii
LIST OF TABLES.....	v
LIST OF FIGURES	vi
ACKNOWLEDGEMENTS.....	vii
ENHANCING THE SOCIAL VULNERABILITY INDEX WITH AN ARTIFICIAL NEURAL NETWORK	1
Introduction.....	1
Background.....	3
Experimental Section.....	6
Study Area.....	7
Population Data	7
Traditional SoVI Construction	9
ANN SoVI Construction	11
Comparison of Traditional and ANN SoVIs	15
Results and Discussion	15
Traditional SoVI Discussion	15
ANN SoVI Discussion	17
Traditional and ANN SoVI Comparison.....	19
Conclusions.....	26
REFERENCES	30

LIST OF TABLES

1	Subset of ACS Variables Used in SoVI.....	10
2	Traditional SoVI Factors and Factor Variables	12
3	Vulnerability Categories and Quantile Upper Bounds	13

LIST OF FIGURES

1	The State of Utah	8
2	Artificial Neural Network Structure	14
3	Traditionally Constructed SoVI for Utah	16
4	ANN SoVI for Utah	18
5	Traditional SoVI and ANN SoVI Change Comparison.....	20
6	ANN SoVI of the Wasatch Region	22
7	Radar Plot Comparison of Variable Handling	24
8	Nonlinearity in the Population Data for Utah	28

ACKNOWLEDGEMENTS

I would like to acknowledge the help and support of Tom Cova, Rich Medina, and Neng Wan in conceptualizing, conducting, and preparing this thesis; their time, patience, and helpful commentary was invaluable to me in working through this project. I would also like to acknowledge my friends and family for their patience with me as I conducted the research and writing that has culminated in this document.

Special thanks go to my wife, who married me right in the middle of my research, and who has put up with me at both my best and my worst as I worked on this project. Her support, patience, and love have been critical to my success, and I owe a great deal to her.

ENHANCING THE SOCIAL VULNERABILITY INDEX WITH AN ARTIFICIAL NEURAL NETWORK

Introduction

Contemporary research on the human dimensions of environmental hazards typically falls into three paradigms: 1) the exploration of social vulnerability that potentially contributes to enhanced disaster impact; 2) the exploration of disaster resilience, the capacity for communities and individuals to ameliorate and recover from the impact of a disaster; and 3) exploration of social perceptions that can enhance or mitigate the impact of a disaster [1-5]. While efforts in all three areas advance our understanding of the human component of environmental hazards and disasters, social vulnerability has the longest record of research in the environmental hazards discipline of the three paradigms [2].

Social vulnerability, as presented by Cutter [2,3], focuses on identification of vulnerability as it is constructed through social systems through exploration of demographic data to create a Social Vulnerability Index (SoVI). Exploration of these data to determine the factors that contribute to social vulnerability for an area, typically a U.S. Census enumeration unit, is conducted using Principal Components Analysis (PCA), which allows the data to drive factor selection for vulnerability. The loaded demographic variables in the PCA are identified to have specific representations of vulnerability based on our existing understanding of the role of social inequality on social vulnerability, and

the PCA-identified factors are used to calculate the SoVI score for each enumeration unit. The SoVI has been demonstrated at a variety of scales, from the census block level to the county level across the United States [3,6] and at the county level in Norway [7], though the PCA approach has only been demonstrated at the county level [3,7].

While the current method of SoVI construction has served analysts well for more than a decade, there are still areas for potential improvement. The PCA used in SoVI is a linear statistical method that can present problems for often-nonlinear geographic human data. An approach to address this problem may lie in using an Artificial Neural Network (ANN). An ANN is a data-driven method similar to PCA; however, it is a classification method, when used in a supervised capacity, which may eliminate complications from nonlinear data [8,9].

This study compared the traditional SoVI approach with a modified SoVI approach with an ANN classification extension using a case study for the state of Utah. More specifically, the comparison between the traditional SoVI method and the ANN-classified SoVI identified how the two differed.

Through conducting this study we sought to answer the following questions:

1. How does an ANN SoVI result compare to the result of a traditional SoVI for a given region?
2. How and where do the results differ and why?
3. How can the ANN classification be interpreted relative to the traditional method regarding its strengths and weaknesses?

A point of concern in this approach is the use of the traditional SoVI result for a given region as a valid reference for the ANN SoVI. A common concern that arises in the

discussion of the use of indices, in a broader sense, is that such indices are independent of their source data, that a given index has no direct relationship with what it is representing. The use of indices continues in spite of this challenge, however, as stronger alternatives often do not exist. Getting back to the concern of using one index to serve as the valid basis for a new index—basing the ANN SoVI on the traditional SoVI—it is important to note that the purpose of this study is not to make claims of index validity and appropriateness in a broader, theoretical sense. Such deliberation is beyond the scope of this project. As such, this study will proceed as though the traditional SoVI is a valid method, supported by more than ten years of use in the literature [2,3,6,7]. This is central to the purpose of assessing the viability of the use of an ANN to improve upon the traditional methodology.

Background

The concept of SoVI is a component from Susan Cutter's Hazards of Place (HoP) model, which seeks to integrate physical vulnerability and social vulnerability in an intuitive way [2,3]. The approach fuses two concepts in a novel way: vulnerability has to do with both proximity to hazards and political-economic factors. Cutter took this fusion a step further, however, and describes the concept of HoP as vulnerability that is a place-based characteristic of the vulnerable population where they live [2,6]. Vulnerability therefore varies at different scales, and takes into consideration generalization principles: the smaller the analysis scale, the more locally relevant the model will be for the population in that place. Place is implied to mean a human occupied space, an occupied location [2].

Cutter first introduced the HoP model with William Solecki in a 1989 paper on patterns of U.S. airborne toxic releases [10]. Cutter continued to work with the HoP concept through the 1990s, where the model expanded to include broader physical and social characteristics of hazard vulnerability [2]. The vulnerability model came to include hazard potential as a combination of risk and mitigation, which itself was broken into the related parts of social fabric, geographic context, biophysical vulnerability (akin to the proximity to hazard school of thought), and social vulnerability (similar to the social vulnerability aspects of political-economic concepts of social vulnerability) [2] (p. 78). Social fabric in this model represents the social and political background of the place and how that impacts social vulnerability, while geographic context accommodates more the physical characteristics of the place landscape as they operate together with biophysical hazards. The HoP model integrates these characteristics which results, when applied to a place, in a holistic assessment of its vulnerability. The joining of physical risk with a SoVI as the social vulnerability component has been done in several works by Cutter and others in the years following the creation of the HoP model to demonstrate its capabilities [2,3,6].

Further work involving the SoVI has gone on to explore how robust the SoVI is in terms of sensitivity and variance at different scales [3,11]. Schmidtlein et al. [11] determined that scale and minor changes in variable selection had little impact on the efficacy of the SoVI, a concern noted in Cutter's work. Demonstrating the robustness of the method opened up the opportunity for Holand and Lujala [7] to follow with an approach to adapt the SoVI to a new geographic context, in their study's case translating the United States-centric SoVI to apply to Norway. Holand and Lujala [7] altered the

variable selection for the SoVI to better reflect the cultural, social, and political context of Norway. These two approaches strengthened the viability and flexibility of SoVI for further use in hazards research.

With this adaptive element identified by Holand and Lujala [7] coupled with index sensitivity analysis by Schmidtlein et al. [11], new possibilities opened for advancing the power of the SoVI. One such opportunity becomes apparent when considering Stephen and Downing's [12] assessment of vulnerability to famine and food insecurity in Ethiopia in a comparison between three methods. The authors compared the commonly used Household Food Economy Approach and RiskMap and Classification and Regression Tree methods, and then compared those two to a new approach utilizing an ANN.

An ANN is a machine-learning computation method capable of performing data exploration (in an unsupervised mode) and data classification (in a supervised mode) [13]. The method has a basic structure of three node layers: one layer of inputs with one node per variable input; one hidden layer of nodes that perform the analysis in the model, commonly one plus the number of input nodes; and one output layer, with the number of nodes equal to the number of class outputs desired [8,9,13]. The input nodes pass their values to each of the hidden nodes, which then perform the relationship analysis of the inputs, and then pass the classification out to the output nodes [8,9,13]. A common modification to this basic structure in modern studies using ANNs is the inclusion of back-propagation, whereby the result of the analysis in the hidden nodes is passed back to the network links between the input and hidden layers to apply an auto-adjusting weight to the network links to enhance the performance of the ANN [8,13]. The structure of the ANN and its relationship algorithm has been determined to implicitly capture nonlinear

relationships in data applied to an ANN [8,9,13].

Stephen and Downing [12] found that the ANN could produce comparable results, but more importantly performed some diagnostics on the functionality of the ANN in a vulnerability context. They found that their ANN was not sensitive to spatial scale and further determined that their ANN could accommodate datasets with different scales, which could suggest a possible way to address the Modifiable Areal Unit Problem in SoVI construction [14,15]. The ANN was also identified as having captured nonlinear relationships in their data, even when the data were autocorrelated [12], consistent with statements about ANN performance by Fischer and Abrahart [13]. As noted by Stephen and Downing [12] and Fischer and Abrahart [13], topology between observations can also be maintained in some applications of the ANN. Ultimately, Stephen and Downing [12] opened up a new pathway for social vulnerability and the SoVI through integration of an ANN.

Experimental Section

To explore the modification of the SoVI method, we constructed an experiment to first assess vulnerability for Utah using the traditional method. From that point an ANN was constructed to expand the SoVI with a nonlinear method to enhance the results. The following sections describe in greater detail the procedure used to explore this application of ANN to expanding SoVI.

Study Area

Utah is a state located in the Rocky Mountain West with a population in 2010 of 2,763,885 (Figure 1) [16]. The state has 29 counties, 18 of which have a population of 25,000 or fewer. Utah's capital is Salt Lake City, located in Salt Lake County, which is also the largest city in the state with a municipal population of 186,440 as of the 2010 decennial census [16]. The population distribution is nonuniform throughout the state, as a large portion of the population of the state is centered in the Ogden-Salt Lake-Provo corridor of the Wasatch Front, with the remainder of the state mostly rural.

The residents of Utah are exposed to a wide range of environmental hazards, including, but not limited to: wildfire, earthquakes, drought, airborne toxic releases, blizzards, and flash flooding. While Utah is not the most populated state in the United States, residents nonetheless face hazards that can cause economic losses, and in the worst case, loss of life.

Population Data

To conduct our study, we took a subset of the United States Census Bureau's American Community Survey (ACS) data for the state of Utah for a five-year period to account for as many social factors as possible from the traditional SoVI method [3]. The ACS surveys a small sample of the population each year to supplement and expand on the decennial census and to provide other statistics products useful for planners in a variety of contexts [17]. We selected the five-year data for this study to reduce the effects of error, which is reduced through the combination of the samples from each of the years, thereby increasing the sample size. The period of our dataset is from 2008 to 2012.

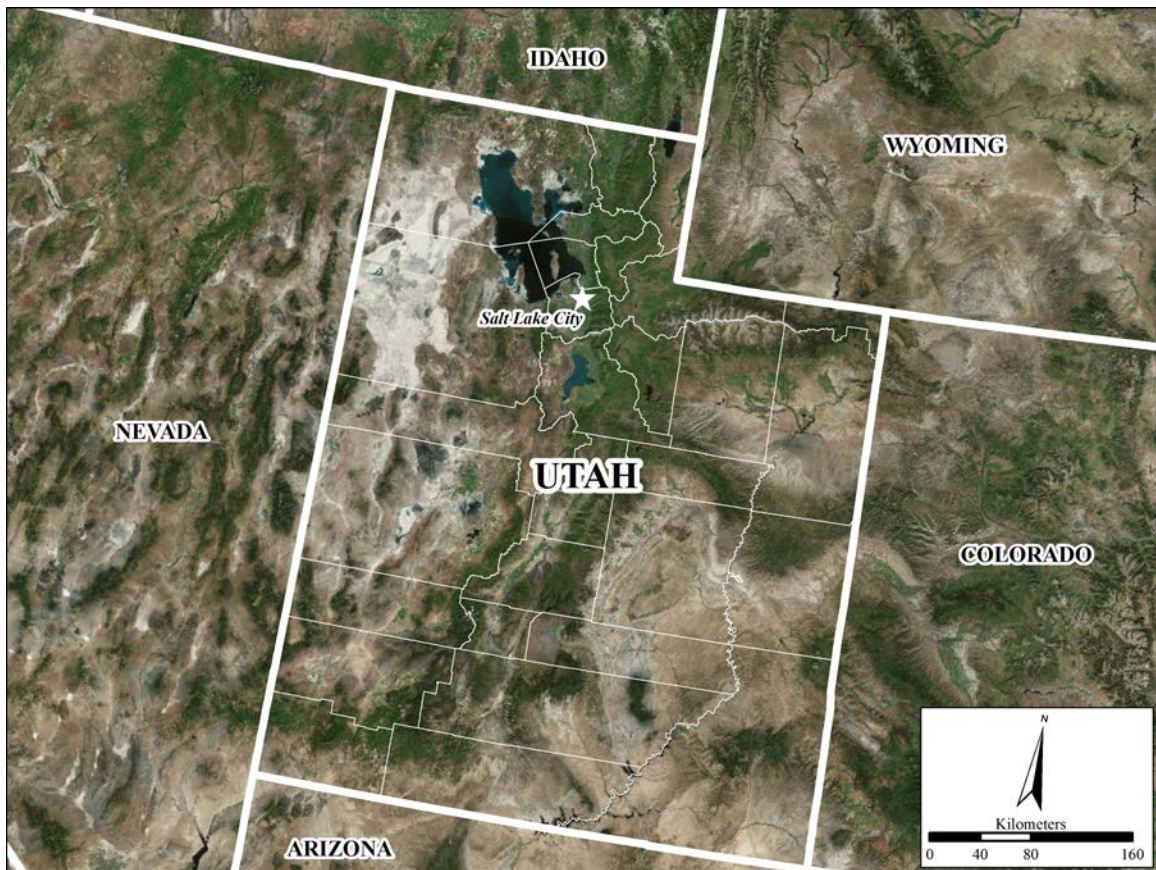


Figure 1. The state of Utah in the Western United States.

The ACS data are aggregated at a variety of levels for different needs. We selected the smallest aggregation level that the ACS is published in for this study, the census block group level—the second smallest aggregation unit the Census Bureau uses in published data. This was done to capitalize on two key benefits: a relatively fine spatial scale to assess vulnerability and the largest possible number of aggregation units for the study area. The relative quality of the ACS is less important than the ready availability of a large number of demographic variables no longer collected in the U.S. Census Long Form, particularly as the internal consistency of the data is the only validity concern for this study.

The five-year ACS data for Utah at the census block group level is composed of 1690 census block groups and contains a total of 2739 variables with respective margins of error. The subset of the variables used in this study totaled 60 variables from the ACS and 1 variable from the census block group geometry (Table 1). Some of the variables were combined where appropriate to produce more broadly descriptive variables, such as with public education attainment.

Traditional SoVI Construction

The ACS variables attached to the census block groups for Utah were exported from the GIS into a shapefile format and read into R using the “maptools” package. The database table containing the variables for the state was translated into a data frame in R. Once the data were in the correct internal format in R, PCA was run on the data using the “prcomp” function. The data were scaled in the function to center all of the variables and to ensure the variance was not skewed by differences in variable magnitude. The resultant

Table 1. Subset of ACS variables used in the study with descriptions and whether the variable was derived from a larger group of variables from the ACS data.

Variable Name and Number	Derived	Variable Description
MEDIAN_AGE (1)	No	Median age
PER_CAPITA_INCOME (2)	No	Per capita income
MED_VAL_OWN_OCC_HOUSING (3)	No	Median value of owner occupied housing
MED_RENT_RENT_OCC_HOUSING (4)	No	Median rent of renter occupied housing
NON_WHITE (5)	Yes	Proportion of population that is non-white
PC_POP_UNDER_5 (6)	Yes	Proportion of population under the age of 5
PC_POP_OVER_65 (7)	Yes	Proportion of the population over the age of 65
PC_CIVIL_LABOR_UNEMPLOYED (8)	Yes	Proportion of the civil labor force that is unemployed
AVG_PEOPLE_HOUSE (9)	No	Average number of housing occupants
PC_HOUSE_EARN_MORE_75K (10)	Yes	Proportion of population earning more than \$75,000 per year
PC_POVERTY (11)	Yes	Proportion of population living below the poverty level
PC_RENT_OCC_HOUSING (12)	Yes	Proportion of housing occupied by renters
PC_MOBILE_HOME (13)	Yes	Proportion of occupied housing as mobile homes
PC_POP_OVER_25_NO_DIPLOMA (14)	Yes	Proportion of population over 25 with no high school diploma
NUM_HOUSING_SQ_MI (15)	Yes	Housing density by square mile
PC_POP_IN_LABOR_FORCE (16)	Yes	Proportion of population in labor force
PC_EMP_EXTRACTIVE (17)	Yes	Proportion of labor force employed in extractive industry occupations
PC_EMP_TRANSCOMMUTIL (18)	Yes	Proportion of labor force employed in transportation, communications, and utilities occupations
PC_EMP_SERVICE (19)	Yes	Proportion of labor force employed in service occupations
PC_FEMALE (20)	Yes	Proportion of population that is female
PC_FEM_ONLY_HOUSE (21)	Yes	Proportion of households headed by a female with no spouse present
PC_HOUSE_SS_INCOME (22)	Yes	Proportion of households receiving social security income

PCA analysis produced a total of 22 principal components of which 13 were selected as social factors with 87.8% of the variance explained (Table 2).

From this selection of social factors, a function was created to additively combine the factors—using the variable loadings—into the final SoVI score. The function used to add the loadings is shown below:

$$-F1 + F2 + F3 + F4 + F5 + |F6| - F7 - F8 + F9 + F10 - F11 + F12 + F13 \quad (1)$$

The data were exported back to GIS to visualize social vulnerability for the state. The SoVI scores were symbolized using quantiles with five breaks. The breaks represent categorical vulnerability (Table 3).

ANN SoVI Construction

The data were loaded into R using the “maptools” package once again. The database table was loaded into a data frame in R and unnecessary fields were stripped from the table (i.e. the SoVI score table, GIS-generated fields, etc.). The data were then partitioned into two sets, one training set and one prediction set. The training set was 70% of the data, totaling 1183 census block groups, with the remaining 507 census block groups used for ANN classification.

The ANN was created using the “nnet” package. The network had 22 input nodes, equal to the number of input variables. The hidden layer had a number of nodes equal to the input nodes plus one, or 23. The output layer had five nodes, equal to the number of social vulnerability categories (Figure 2).

Table 2. Traditional SoVI factors with cardinality, factor name and proportion of variance explained (rounded), and dominant social variables with factor loading cardinality.

Factor 1 (-)	Factor 2 (+)	Factor 3 (+)	Factor 4 (+)	Factor 5 (+)	Factor 6 (abs)	Factor 7 (-)
Wealth (22)	Elderly (13.9)	Extractive (8.9)	Female (6.9)	Dis- advantaged (5.5)	Employment (4.9)	Housing (4.4)
per capita (-)	med age (+)	renters (+)	female (+)	non-white (+)	unemployed (-)	median rent (-)
earn >75K (-)	over 65 (+)	house sqmi (-)	fem only home (+)	under 5 (+)	avg house size (-)	
	SSI receive (+)	extract emp (+)		female (+)	extract emp (+)	
					service emp (+)	
Factor 8 (-)	Factor 9 (+)	Factor 10 (+)	Factor 11 (-)	Factor 12 (+)	Factor 13 (+)	
Housing (4.1)	Race and Employment (4)	Dis- advantaged (3.6)	Employment (3.5)	Dis- advantaged (3.1)	Extractive Employment (3)	
median rent (-)	non-white (+)	mobile homes (+)	service emp (-)	under 5 (-)	mobile homes (+)	
	unemployed (-)	extract emp (+)		unemployed (-)	extract emp (-)	
		fem only home (+)		fem only home (+)		

Table 3. Vulnerability categories and their respective quantile break upper bound value.

Upper Bound of Category	Category
-1.59	Very Low
0.62	Low
2.44	Moderate
4.60	High
22.77	Very High

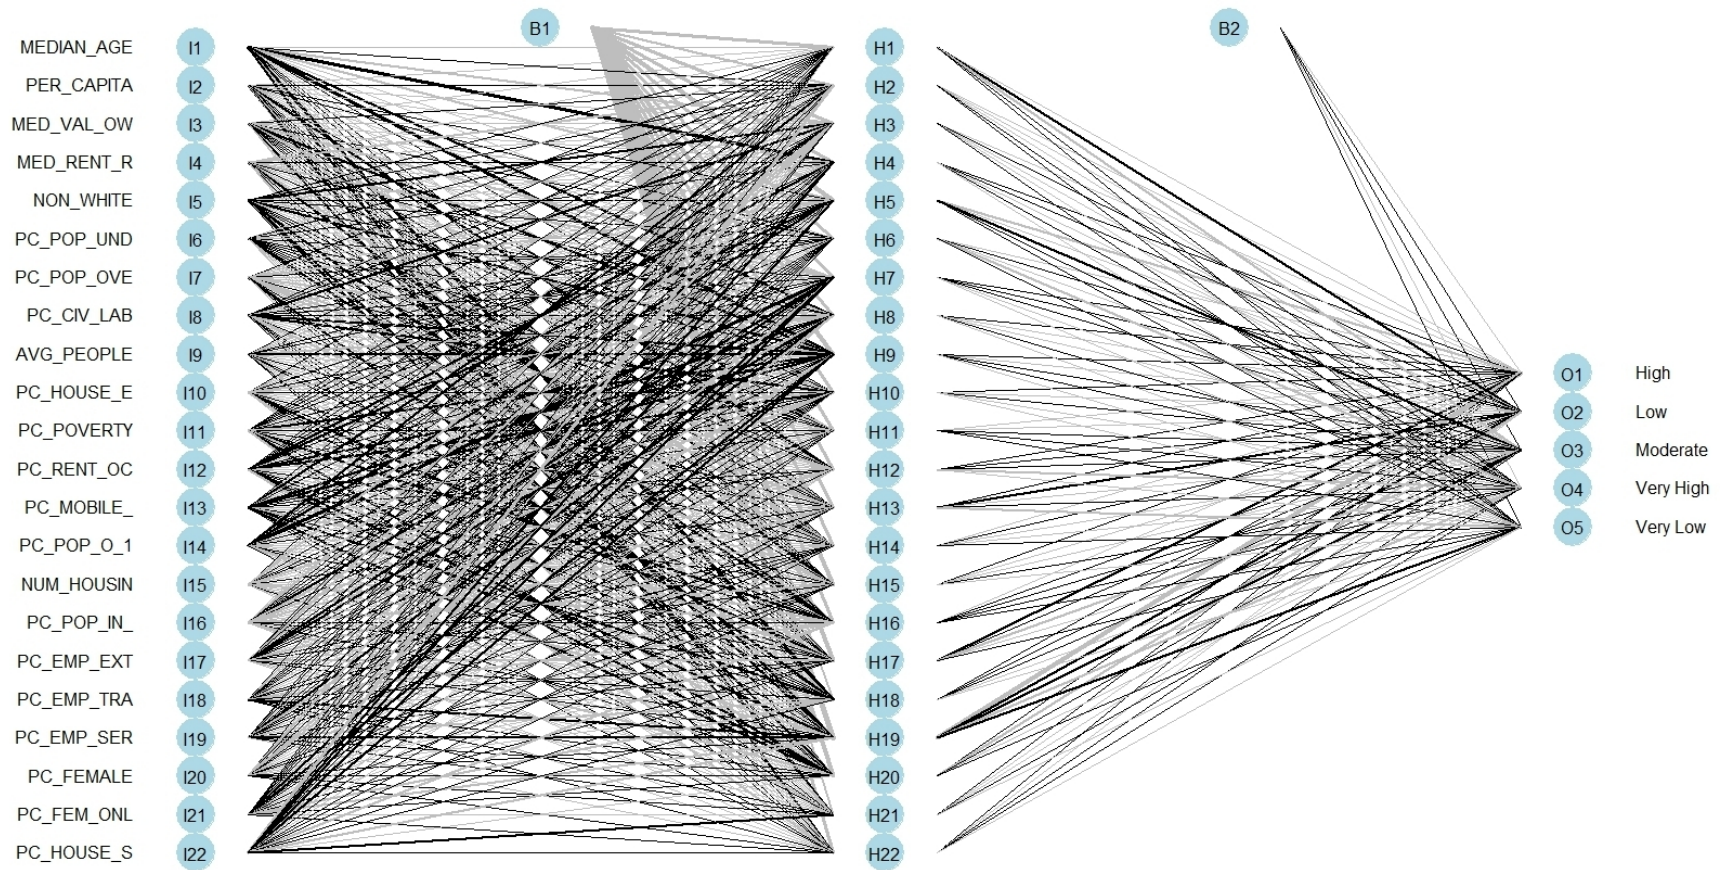


Figure 2. Structure of the neural network used to classify SoVI for Utah. The network contains 22 input nodes, 23 hidden nodes, and 5 output nodes.

The final ANN was run five times for categorical classification to find a common convergence value to determine that the model was running consistently and producing consistent results. A static seed value was also set in the process to ensure consistency in output. All of the classification runs converged at the same value, even when the model was run on other machines. The ANN was run multiple times with slight variations to the structure; however, the structure presented here performed the best of the test cases.

Comparison of Traditional and ANN SoVIs

The comparison of the traditional SoVI against the ANN-extended SoVI was conducted using a combination of expert knowledge of vulnerability in Utah, change detection, and radar plot comparisons of the social variables. Due to social vulnerability being assessed using an index, validation cannot be conducted using direct measurement. For this study, we focused primarily on determining if the two methods produced similar results and compared the performance of the methods based on that determination.

Results and Discussion

Traditional SoVI Discussion

The traditional SoVI method result, the PCA scores, was categorized into classes of vulnerability based on a quantiles (Figure 3). The represented social vulnerability for the state of Utah reveals a loose pattern of vulnerability. High and very high vulnerability block groups are generally found in the south and eastern parts of the state, while low and very low vulnerability block groups are scattered throughout the state; however, those classes are more common in the central and northwestern parts of Utah.

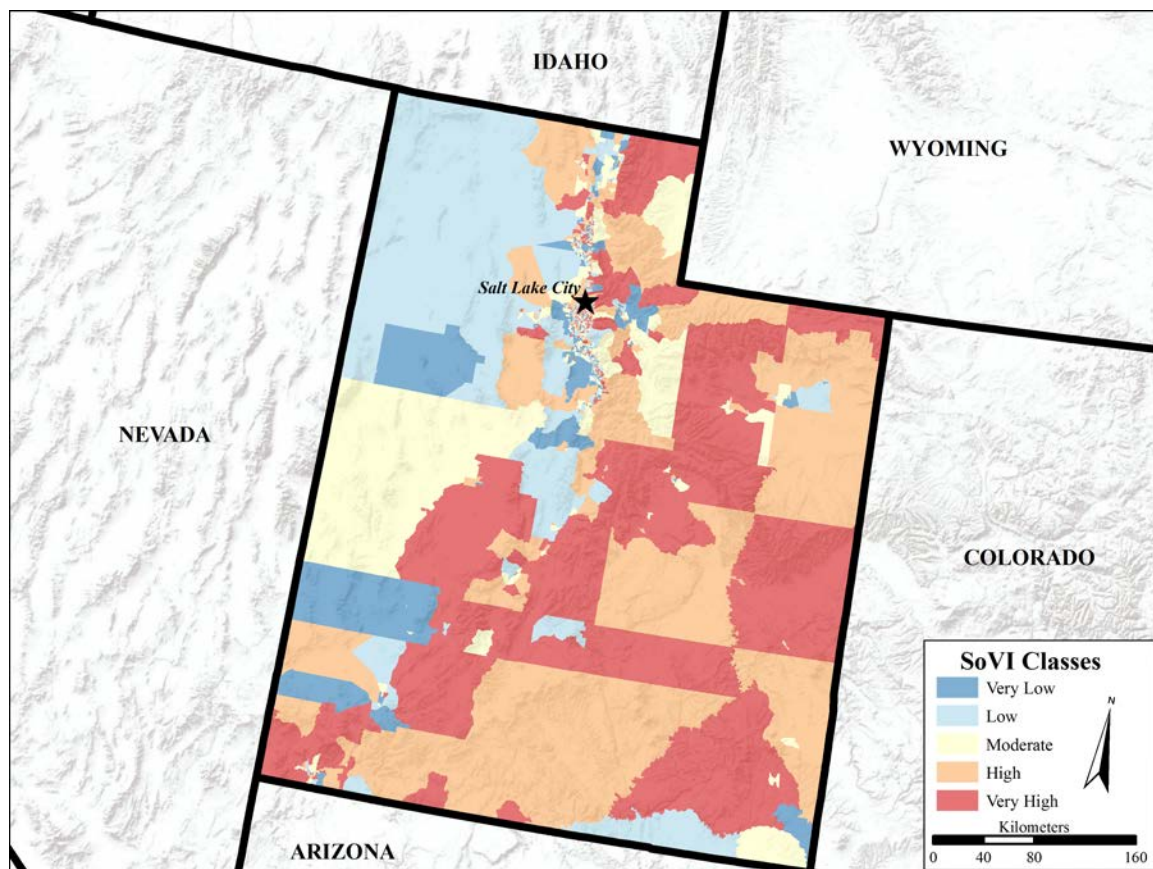


Figure 3. The SoVI constructed for the state of Utah using the traditional approach.

It is interesting to note that the traditional method produced a few instances of potential misclassification. The method classified census block groups with zero population as having high vulnerability. These block groups were used to test if the ANN would reclassify the block groups more appropriately, with the PCA results passed to the ANN in different trials, corrected (the misclassified block groups were reclassified) and uncorrected (the misclassified block groups were unchanged). Figure 3 displays the uncorrected traditional SoVI result to compare with the ANN SoVI result with the uncorrected block groups shown below.

The SoVI result from the traditional approach is largely consistent with understanding of vulnerability in Utah based on qualitative assessment by the authors. Further, the pattern is consistent with a smaller scale study using different datasets for Salt Lake County in Utah [18]. The authors accept the traditional SoVI used in this study, with the limitations noted in the previous paragraph, as a valid result.

ANN SoVI Discussion

The ANN was trained using 70% of the data, totaling 1,183 census block groups. The remaining 507 block groups were used to test the classification capability of the trained ANN (Figure 4). The classification by the ANN produced a roughly evenly distributed classification. Each of the classes was of a size within one standard deviation of the mean number of block groups in each vulnerability class; however, the very low class had 129 block groups. It may appear that the very low class is slightly biased. Comparison between the traditional SoVI and the ANN-extended SoVI revealed some of the nature of the ANN classification, as discussed in the following section. It is also worth noting that

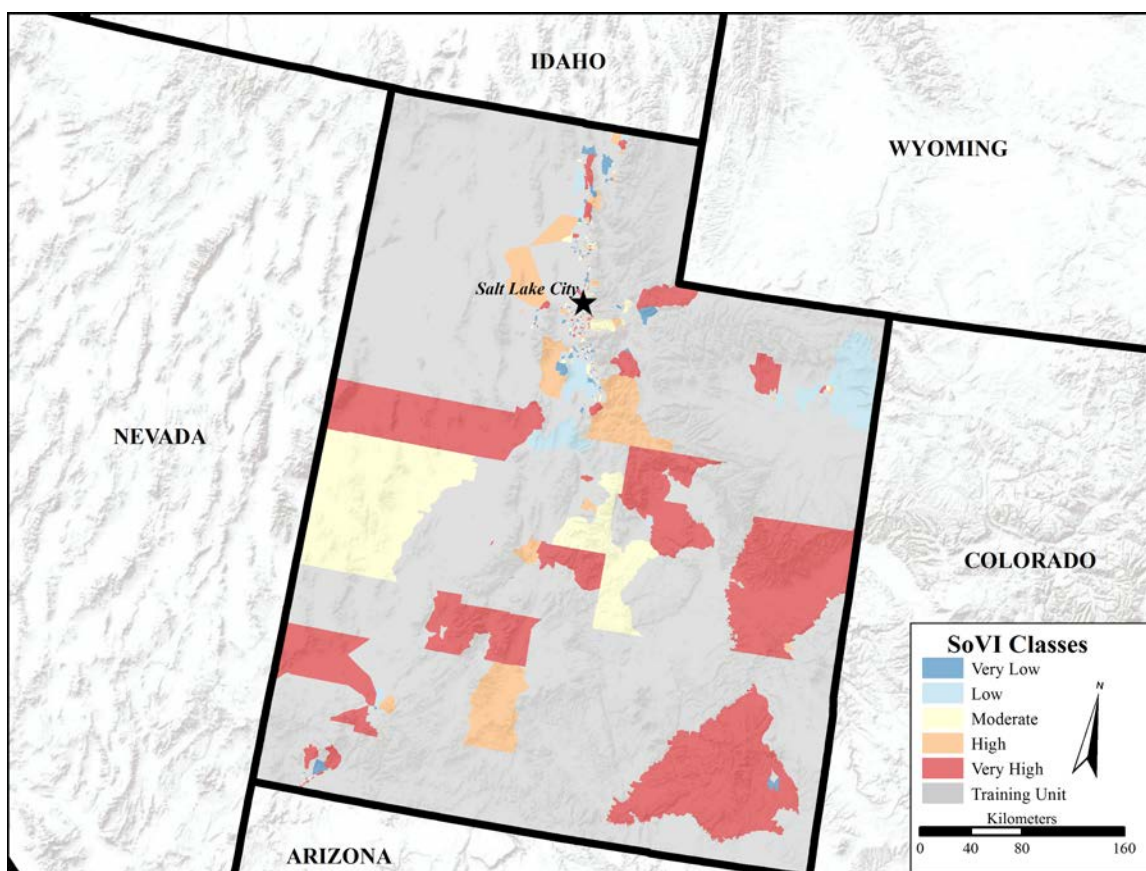


Figure 4. The SoVI for the state of Utah constructed using the ANN-extended method.

the ANN classification produced consistently the same results with a specified seed value in R over multiple model runs, indicating stability in the classification.

Traditional SoVI and ANN SoVI Comparison

Comparing the two results proved challenging. The diagnostic information that could be extracted from the two methods—the PCA loadings and the network weights—were not directly comparable. We used a comparison of the cardinality and relative magnitude of the weights from the PCA and the ANN to give an idea of how variables were being handled between the two methods, used as a guide to interpret two other methods of comparison between the results.

The first part of the comparison was conducted through the analysis of a change detection plot between the traditional SoVI and the ANN SoVI with an accompanying change matrix (Figure 5). The first thing of note is the agreement between the two methods. The ANN-extended SoVI produced a classification that was consistent with the traditional SoVI over 26% of the classified block groups. While this may seem low, it is important to note that the two methods should produce different results; it is therefore encouraging to find some (but not total) agreement between the methods. Where the methods differ there are opportunities for further investigation into how the ANN differed from the PCA.

Referring back to the previous section and the possible concern of classification bias in the very low vulnerability class, we can see from the change matrix that the two methods had the second highest agreement in the very low class. Further, the bulk of the reclassification came from block groups classed as moderate and low vulnerability in the

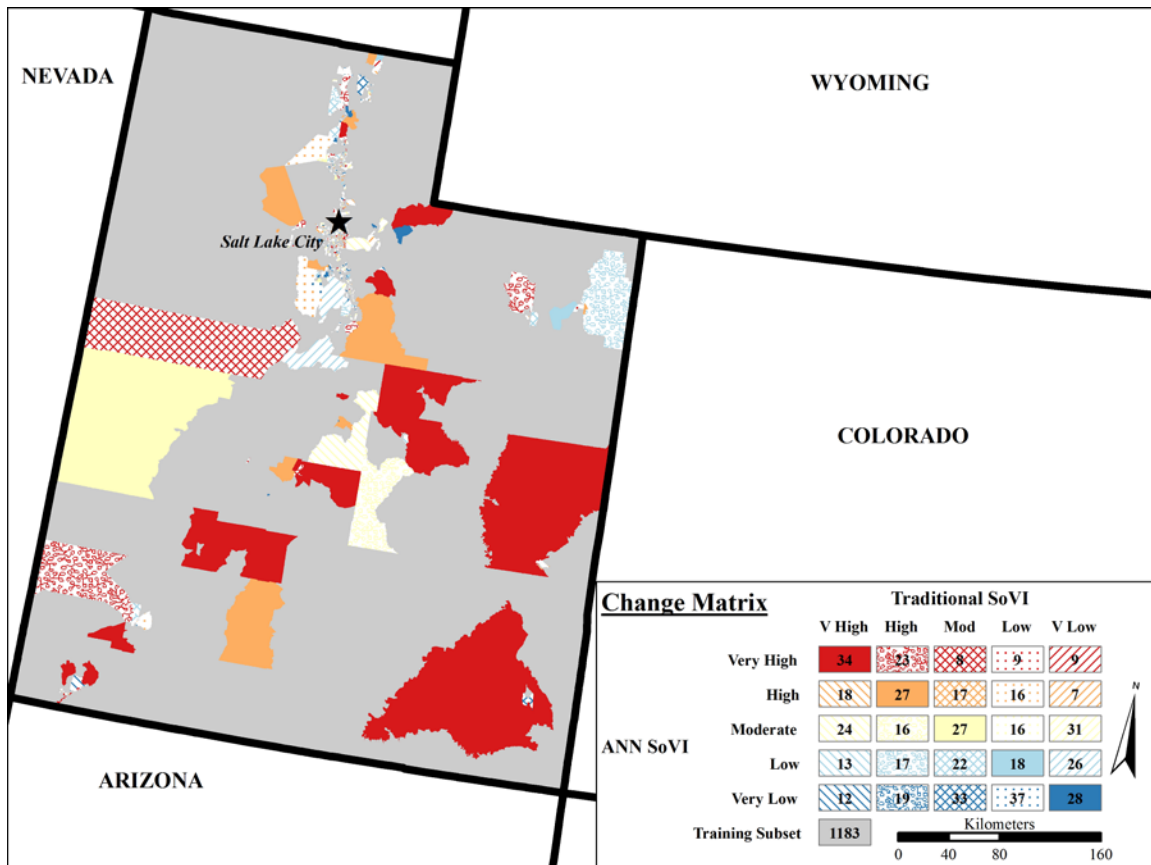


Figure 5. Comparison of the traditional SoVI classes and the ANN-extended SoVI classes for the state of Utah. The legend includes a change matrix showing how the traditional SoVI classified the census block groups against how the ANN-extended SoVI classified the same census block groups for the classification subset.

traditional SoVI. Based on this information it appears that there may be a bias to the very low vulnerability class. Many of the block groups changed from their traditional SoVI classification through the ANN classification, and it is noteworthy to point out that this occurred from each class to each other class. This may be evidence that the ANN was able to capture nonlinear relationships in the data and express that in its classification.

Using the misclassified block groups from the traditional approach as an extra diagnostic, we found that the ANN classified the (potentially) misclassified block groups into the same category as the traditional approach. This result is encouraging as the ANN may have been forced to adjust to accommodate the abnormal block groups. This additional point of consistency between the two classification methods suggests that the ANN is capturing some of the relationships that the PCA also found. The training set included examples of the high category that were not invalid, as well, and was consistent in some of those classifications with the traditional SoVI, but it also classified some of the high block groups into other vulnerability classes. This may indicate that the ANN found a nonlinear relationship between the social variables that caused it to class those block groups differently.

It could further be suggested, from a visual appraisal of Figure 5, that the rural areas of Utah dominate the training set for the ANN. A closer look at the Ogden-Salt Lake-Provo urban corridor—where more than two-thirds of the state’s population live—reveals that the block groups within the most densely populated part of the state are well represented in the training data as well as in the classification set (Figure 6).

The second part of the comparison was conducted by qualitatively assessing the social variables of the block groups and the classification results from both methods. By






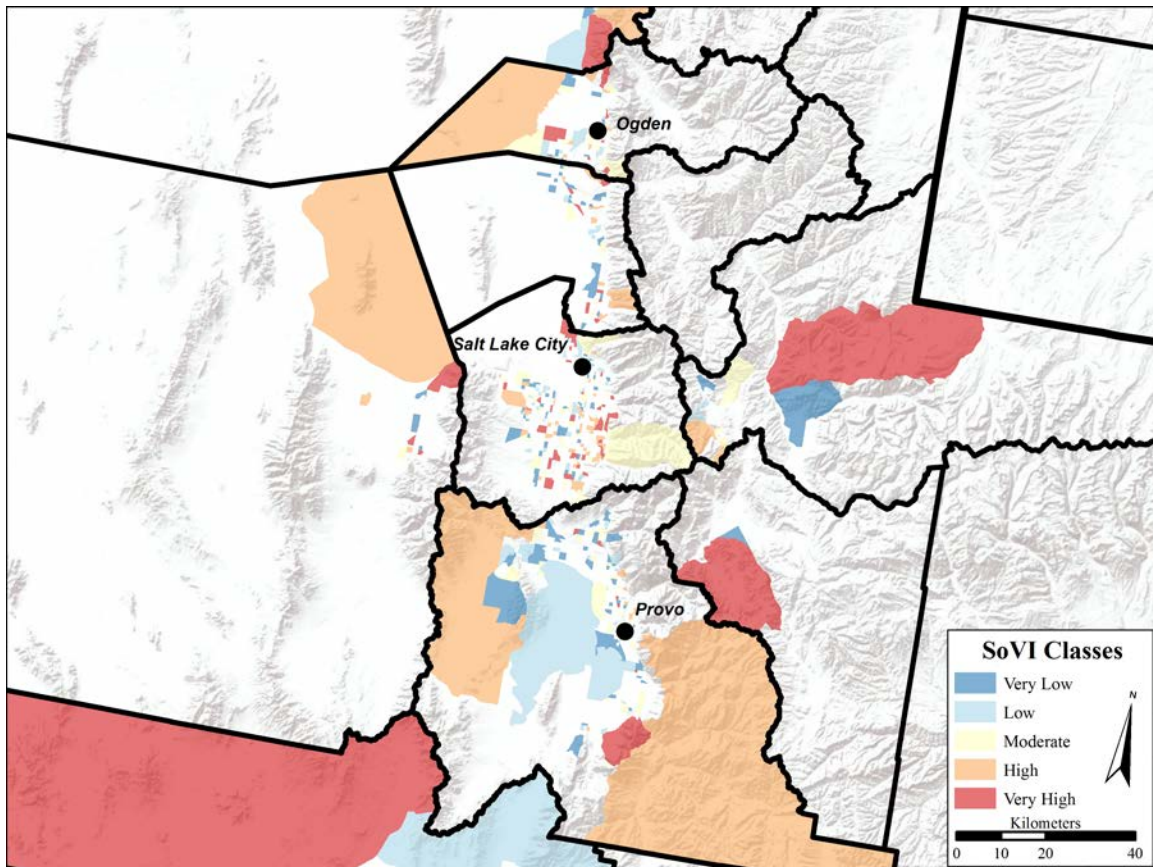


Figure 6. A zoomed-in view of the ANN-extended SoVI result with training block groups in gray, focused on the Ogden-Salt Lake-Provo urban corridor.

constructing radar plots with each variable—the variables were standardized and averaged for each vulnerability class—represented on its own X-axis, we were able to determine the tendency of variable importance in the classifications (Figure 7). The radar plots reveal relative internal consistency for how both the traditional approach and the ANN classified the block groups. An additional element was added to show the variable tendencies for the block groups where both the traditional and ANN SoVIs agreed. From Figure 7 we can see that the tendency for very high, moderate, and low vulnerability lined up well between both the traditional classification and the ANN classification (Figures 7a, 7c, and 7d). The most obvious variations occur in how both methods classified high and very low vulnerability block groups (Figures 7b and 7e). The ANN placed greater emphasis on median age (variable 1), per capita income (2), and median value of owner-occupied housing (3) for high vulnerability than did the traditional classification, whereas the ANN deemphasized the contribution of the percentage of the population living in poverty (11) and the percentage of housing units that are renter-occupied (12)—the longitudinal axis numbers on the figures correspond to the social variable numbers in Table 1. This difference between the two classification methods may be a case where the ANN is handling the variable relationships in a nonlinear way.

Through analysis of the differences between the traditional SoVI and the ANN-extended SoVI classifications, we were able to determine that the results from both methods were reasonable and that the two methods could be readily compared. The comparison revealed situations where the nonlinear nature of the ANN's classification may have been beneficial, resulting in the difference seen in Figure 5. The stability of the ANN classification as the network reached convergence helps to strengthen these

Figure 7. A comparison of the averages of the social variables within each vulnerability class for the traditional SoVI, the ANN-extended SoVI, and the third showing where the traditional and ANN agreed. The outer ring numbers correspond to the variables referenced in Table 1, and the figure in the bottom center serves as the legend. (a) The averages of the block groups classed as Very High vulnerability; (b) The averages of the block groups classed as High vulnerability; (c) The averages of the block groups classed as Moderate vulnerability; (d) The averages of the block groups classed as Low vulnerability; (e) The averages of the block groups classed as Very Low vulnerability.

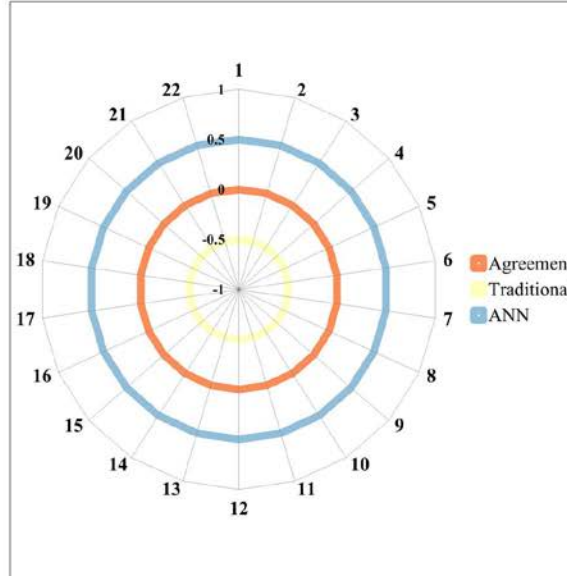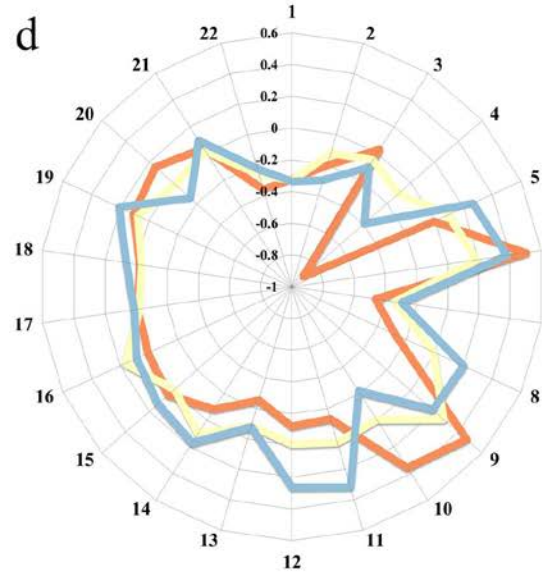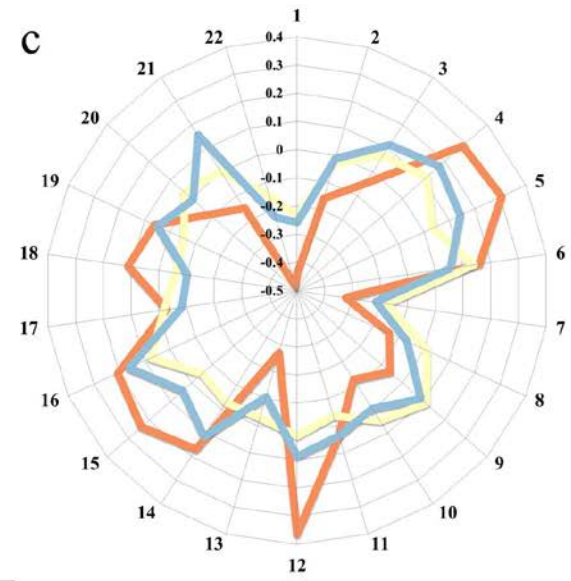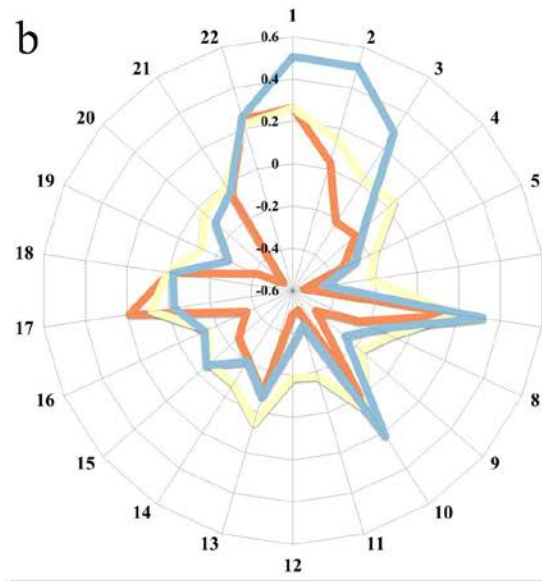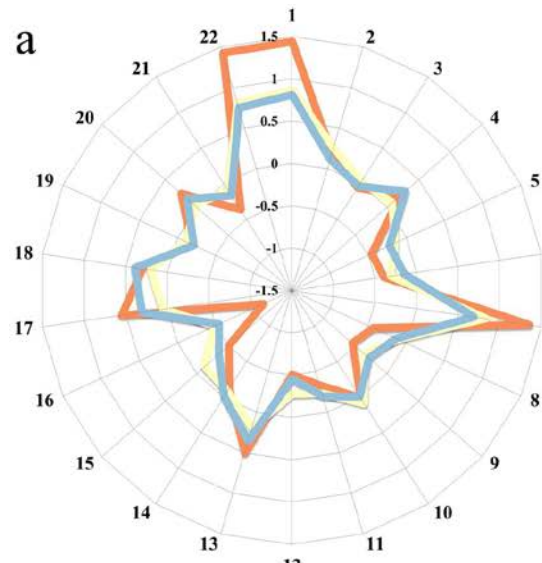

Agreement
 Traditional
 ANN

findings, in addition to the intermethod consistency checked using invalid block groups.

Due to the exploratory nature of this study—to determine if the ANN can enhance the traditional SoVI method—the margin of error term for the ACS variables was not used with the study data. While we did not feel this was necessary for this study, other researchers employing the methodology described in this paper are encouraged to ensure that the margin of error is included to provide the most accurate results.

Conclusions

This study compared the traditional SoVI method of vulnerability classification with a modified form utilizing an ANN. Both the traditional approach and the ANN approach produced reasonable vulnerability classifications for the state of Utah. The methods were only in agreement for 26% of the common block groups; however, partial agreement suggests that both are capable of identifying some relationships in the variables in common; the difference in how relationships were handled may suggest that the ANN captured nonlinear relationships that the PCA could not. Further, agreement between the methods for the invalid block groups classed as high vulnerability in the traditional approach demonstrates cross-method consistency; the ANN was forced to classify the block groups the same as the traditional approach, likely due to the out-of-ordinary nature of variable values for those block groups.

The ANN-extended SoVI may have demonstrated some bias in classification in the high and very low vulnerability classes, with noticeable differences in how the traditional classification and the ANN classification handled variables for those classes. The radar plots of the social variables for each vulnerability class reveal that the ANN handled the

variables for the other three classes similarly to the traditional approach. This internal data-handling consistency between the methods strengthens the finding that the ANN captured nonlinearity between the variables, consistent with statements in the literature [8,9,13], as can be seen in Figure 8. Consistency between model runs of the ANN further strengthen the classification result, as there was no variation in the results between runs and the convergence was identical in each test run.

Using the methodology outlined in this paper, we can summarize our findings with respect to our study questions. Firstly, the traditional SoVI and the ANN-extended SoVI both produced reasonable results for the state of Utah; the classifications of vulnerability from both methods were reasonable for the population when compared to existing work in the region [18,19]. Secondly, the results between the methods were different, but partially consistent. The ANN classified 26% of the classification subset consistently with the traditional SoVI, indicating that both methods were able to capture similar variable relationships. However, the ANN classified the remaining subset differently, in some cases to one vulnerability class away from the original (e.g. from very high to high). Analysis of the variable tendencies in the vulnerability classes for both methods suggests that both methods handled the variables in largely the same way, with some notable differences. This divergence between the two models may well indicate that the ANN was able to capture nonlinear relationships in the variables. Finally, if the ANN did, in fact, capture nonlinearity in the variables for its classification, the ANN may prove to be a viable pathway to enhancing the way SoVI is constructed in the future. The consistency between the methods suggests that both are able to capture some similar relationships and the replacement of PCA with an ANN for creating SoVIs may not

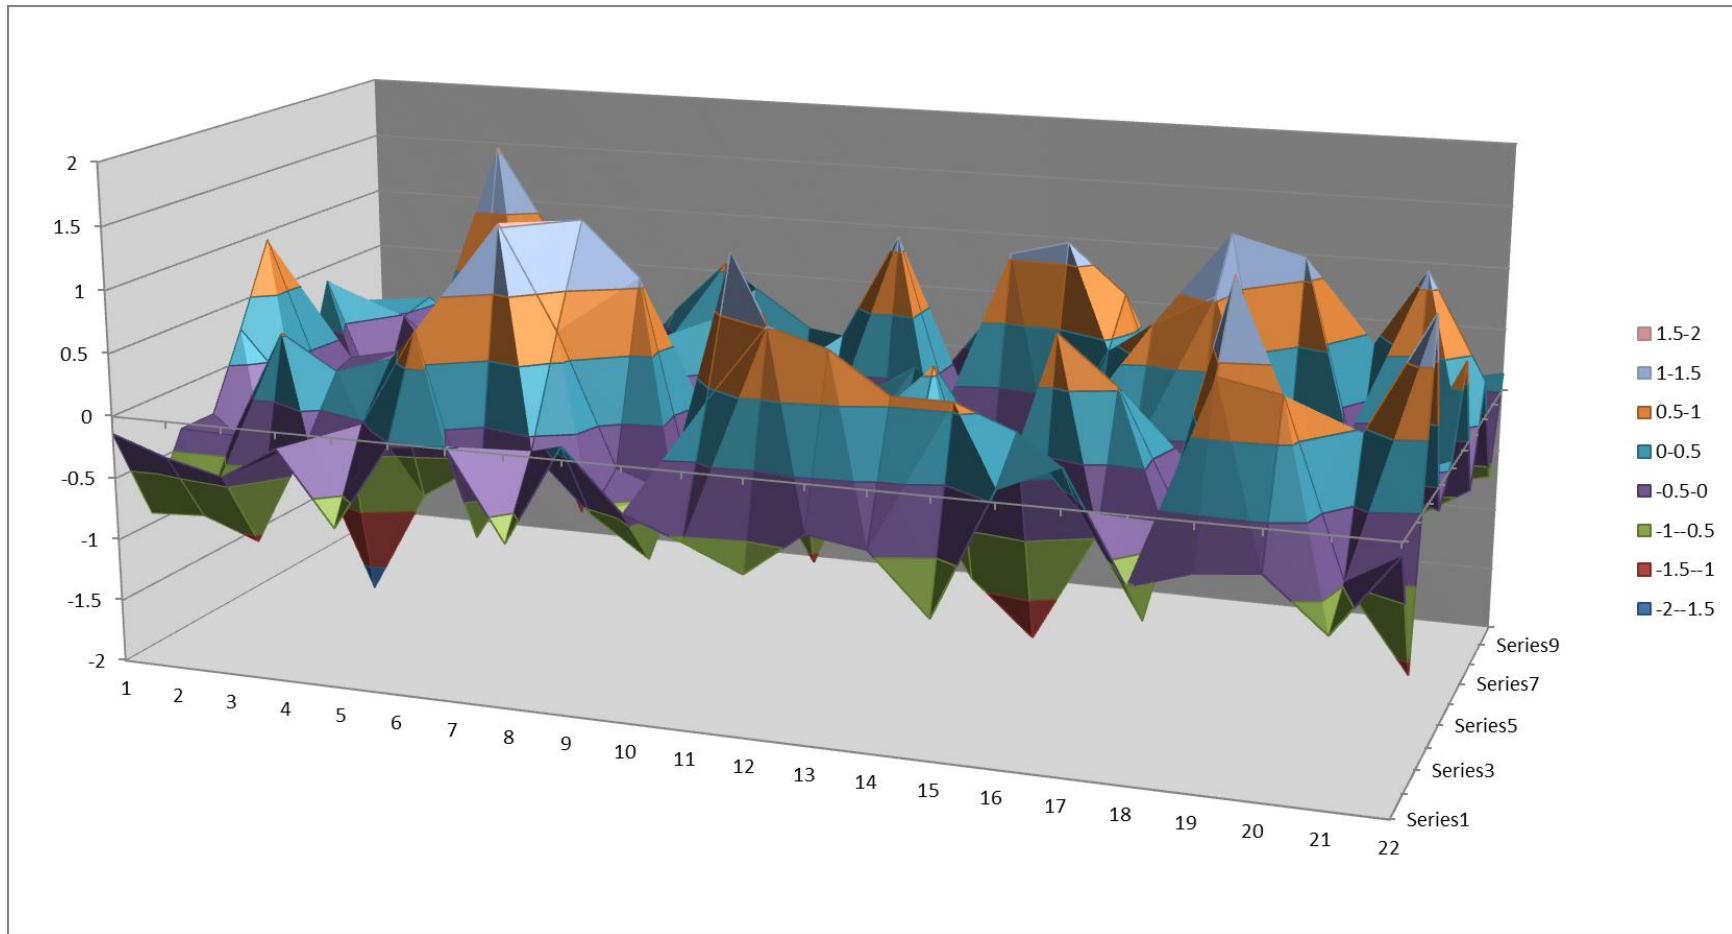


Figure 8. Evidence of nonlinear relationships between the input variables. Ten examples were selected: two of each class from the traditional SoVI that changed to the two most distant classes in the ANN-extended SoVI (e.g., one high to low, one high to very low, one moderate to very high, etc.).

present the loss of classification strength from the PCA. Invalid data, however, presents problems for both methods, despite the strength of consistency found using invalid data; analysts will need to be vigilant to ensure quality data are used when using the ANN, as is the case with the traditional approach.

The methods to explore the use of ANN to enhance the SoVI method outlined in this study demonstrate that this approach may produce a viable alternative to the well-established approach to creating a SoVI for a region. Indeed, the ANN may well have all of the strengths of the existing method with few of its weaknesses, in addition to its own strengths, particularly the handling of nonlinear data-relationships. Further exploration of this method will demonstrate how viable the ANN may be for SoVI analysis, as well as how it may best be implemented for creating a SoVI.

REFERENCES

1. Blaikie, P.; Cannon, T.; Davis, I.; Wisner, B. *At Risk: Natural Hazards, People's Vulnerability and Disasters*; Routledge: London, United Kingdom, 1994.
2. Cutter, S.L. Vulnerability to Environmental Hazards. *Progress in Human Geography* **1996**, *20* (4), 529-539.
3. Cutter, S.L.; Boruff, B.J.; Shirley, W.L. Social Vulnerability to Environmental Hazards. *Social Science Quarterly* **2003**, *84* (2), 242-261.
4. Cutter, S.L.; Barnes, L.; Berry, M.; Burton, C.; Evans, E.; Tate, E.; Webb, J. A Place-Based Model for Understanding Community Resilience to Natural Disasters. *Global Environmental Change* **2008**, *18* (4), 598-606.
5. Wachinger, G.; Renn, O.; Begg, C.; Kuhlicke, C. The Risk Perception Paradox—Implications for Governance and Communication of Natural Hazards. *Risk Analysis* **2013**, *33* (6), 1049-1065.
6. Cutter, S.L.; Mitchell, J.T.; Scott, M.S. Revealing the Vulnerability of People and Places; A Case Study of Georgetown County, South Carolina. *Annals of the Association of American Geographers* **2000**, *90* (4), 713-737.
7. Holand, I.S.; Lujala, P. Replicating and Adapting an Index of Social Vulnerability to a New Context: A Comparison Study for Norway. *The Professional Geographer* **2013**, *65* (2), 312-328.
8. Somers, M.J.; Casal, J.C. Using Artificial Neural Networks to Model Nonlinearity: The Case of the Job Satisfaction-Job Performance Relationship. *Organizational Research Methods* **2009**, *12* (3), 403-417.
9. Mao, J.; Jain, A.K. Artificial Neural Networks for Feature Extraction and Multivariate Data Projection. *IEEE Transactions on Neural Networks*, **1995**, *6* (2), 296-317.
10. Cutter, S.L.; Solecki, W.D. The National Pattern of Airborne Toxic Releases. *The Professional Geographer* **1989**, *41* (2), 149-161.

11. Schmidtlein, M.C.; Deutsch, R.C.; Piegorsch, W.W.; Cutter, S.L. A Sensitivity Analysis of the Social Vulnerability Index. *Risk Analysis* **2008**, *28* (4), 1099-1114.
12. Stephen, L.; Downing, T.E. Getting the Scale Right: A Comparison of Analytical Methods for Vulnerability Assessment and Household-level Targeting. *Disasters* **2001**, *25* (2), 113-135.
13. Fischer, M.M.; Abrahart, R.J. Neurocomputing – Tools for Geographers. In *GeoComputation*, 1st ed.; Openshaw, S., Abrahart, R.J., Eds.; Taylor and Francis: London, United Kingdom, 2000; pp. 187-217.
14. Openshaw, S. *Concepts and Techniques in Modern Geography No. 38: The Modifiable Areal Unit Problem*; Geo Books: Norwich, United Kingdom, 1984; pp. 1-40.
15. Wong, D. The Modifiable Areal Unit Problem (MAUP). In *The SAGE Handbook of Spatial Analysis*, 1st ed.; Fotheringham, A.S., Rogerson, P.A., Eds.; SAGE: London, United Kingdom, 2009; pp. 105-124.
16. American FactFinder Community Facts. http://factfinder.census.gov/faces/nav/jsf/pages/community_facts.xhtml (accessed 26 March 2015).
17. American Community Survey. <http://www.census.gov/acs/www/> (accessed 26 March 2015).
18. Hile, R.; Chaney, P. L. Mapping Social Vulnerability for Earthquake Hazards in Salt Lake County, Utah. *Auburn University Journal of Undergraduate Scholarship* **2013**, *2*, 48-53.
19. SoVI 2006-10 – 30 Variable | State and Regional Maps. http://webra.cas.sc.edu/hvri/products/sovi2010_maps.aspx (accessed 26 March 2015).